


# Zaślepki gwintowane

(do przewodów rurowych prostokątnych)

Część. **82**

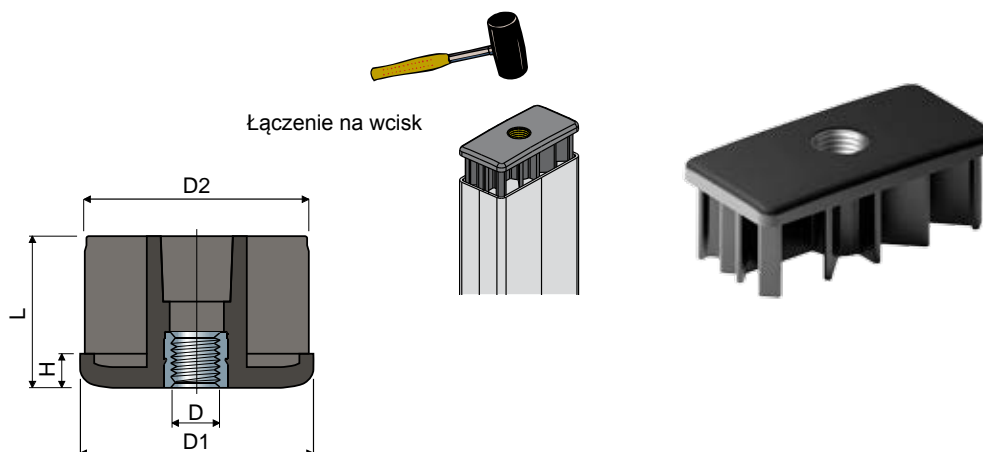

Rozmiar rurki			Gwint	D1	D2	H	L	Kod	Maks. obciążenie statyczne
Zewnętrzna (mm)	Grubość (mm)	Wewnętrzna (mm)							
20x50	2	16x46	M8	20x50	16x46	5	38	82 / 80325	4500
			M8	30x60	25x55	8	38	82 / 82173	4500
30x60	2,5	25x55	M10	30x60	25x55	8	38	82 / 82175	5000
			M12	30x60	25x55	8	38	82 / 82176	5500
			M14	30x60	25x55	8	38	82 / 82177	6000
			M16	30x60	25x55	8	38	82 / 82174	6500
40x60	2	36x56	M14	40x60	36x56	10	45	82 / 85141	8500
			M16	40x60	36x56	10	45	82 / 84309	9000
			M20	40x60	36x56	10	45	82 / 84311	9500
40x80	1,5	37x77	M14	40x80	37x77	10	45	82 / 82973	8500
			M16	40x80	37x77	10	45	82 / 82975	9000
			M20	40x80	37x77	10	45	82 / 82977	9500
	2	36x76	M14	40x80	36x76	10	45	82 / 82180	8500
			M16	40x80	36x76	10	45	82 / 80326	9000
			M20	40x80	36x76	10	45	82 / 80327	9500
3	34x74	M14	40x80	34x74	10	45	82 / 82590	8500	
		M16	40x80	34x74	10	45	82 / 82516	9000	
		M20	40x80	34x74	10	45	82 / 82591	9500	
		2	46x96	M14	50x100	46x96	10	45	82 / 82181
M16	50x100			46x96	10	45	82 / 80693	9000	
M20	50x100			46x96	10	45	82 / 80694	9500	
50x100	3	44x94	M14	50x100	44x94	10	45	82 / 82182	9000
			M16	50x100	44x94	10	45	82 / 82178	9500
			M20	50x100	44x94	10	45	82 / 82179	10000
			3	44x144	M14	50x150	44x144	10	45
M16	50x150	44x144			10	45	82 / 80211	9500	
M20	50x150	44x144			10	45	82 / 80212	10000	
60x120	3	54x114	M14	60x120	54x114	10	45	82 / 82184	9000
			M16	60x120	54x114	10	45	82 / 80209	9500
			M20	60x120	54x114	10	45	82 / 80210	10000

**Materiały:** Zaślepka ze wzmocnionego poliamidu, kolor czarny; gwintowana wkładka z mosiądz niklowany.

**Opakowanie:** 24 sztuki.

Na żądanie

- **Zaślepki:** oferowane z następującymi rozmiarami gwintów, w calach (1/4"-20, 5/16"-18, 3/8"-16, 1/2"-13, 5/8"-11, 3/4"-10, 1"-8, itd.) • różnej grubości i w różnych kolorach.
- **Opakowania:** niestandardowe.